



T320




DAY CAB 6 X 4

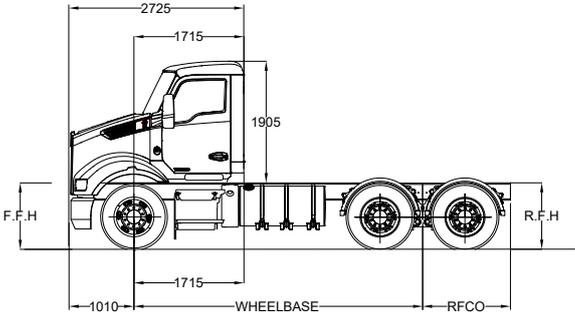

DAY CAB 8 X 4

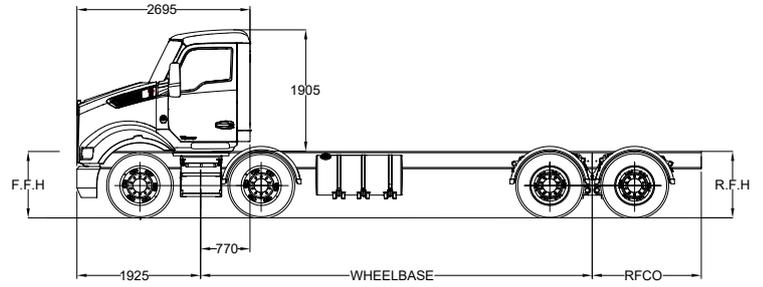

DAY CAB 10 X 4 - TANDEM WITH LAZY

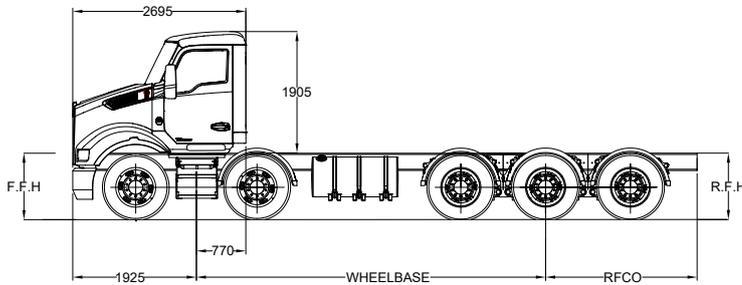

CONFIGURATION

6 X 4	<i>standard</i>
8 X 6	<i>optional</i>
10 X 4 (TANDEM WITH LAZY AXLE)	<i>optional</i>

GCM

40 TONNE LIMIT - L9*

*Higher GCM ratings available subject to Application and Engineering approval.

CAB

DAY CAB	<i>standard</i>
760MM INTEGRATED SLEEPER*	<i>optional</i>

*Not selectable in prospector. UPO required.

SUSPENSION

FRONT - TAPER LEAF, REAR - AIRBAG

TRANSMISSION

MANUAL, AUTOMATIC & AUTOMATED MANUAL TRANSMISSION (AMT)

FRONT FRAME HEIGHT (F.F.H) mm

FRONT SPRING	TYRES		
	11R22.5 R168	275/70 R22.5 R294	295/80 R22.5 FS401
6.5t TAPER	1085	1045	1092
7.2t TAPER	1086	1046	1093
12t TAPER	1063	1023	1070

REAR FRAME HEIGHT (R.F.H) mm

REAR SUSPENSION	TYRES		
	11R22.5 FD664	275/70 R22.5 M749 ECOPIA	305/70 R22.5 X MULTI D MICHELIN
AIRGLIDE 400 AND 600 AND AIRGLIDE 400 + TOUGHLIFT FMT	1026	982	999

IMPORTANT NOTES:

All frame height dimensions are to the top of the frame using 270mm rails. For illustration purposes different configurations have been used. Variations will occur due to tare weight differences caused by optional equipment and fuel. Variations of +/- 25mm can be expected on heavy duty trucks. Heights have been calculated with the tyre in an unladen condition and unless specified, Bridgestone tyres have been used in the calculations, variations will be caused by different tyre manufacturers. For a wide range of options, contact your Kenworth Dealer.

Specifications

ENGINE

L9 260 hp, 859 lb-ft	<i>standard</i>
L9 330 hp, 1000 lb-ft	<i>optional</i>
L9 350 hp, 1050 lb-ft	<i>optional</i>
L9 360 hp, 1150 lb-ft	<i>optional</i>
L9 380 hp, 1250 lb-ft	<i>optional</i>

EXHAUST

SMA IN CHASSIS W/ GROUND DISCHARGE EXHAUST	<i>standard</i>
SMA LEFT OR RIGHT HAND SIDE POST MOUNTED	<i>optional</i>
SMA IN CHASSIS WITH SINGLE CAB MOUNTED	<i>optional</i>

AIR CLEANER

DONALDSON 2500 SERIES AIR CLEANER - UNDER HOOD	<i>standard</i>
--	-----------------

TRANSMISSION - MANUAL

EATON RTLO18913A 13 SPEED, 1850 lb-ft TORQUE	<i>standard</i>
EATON RTO16909ALL 9 SPEED, 1650 lb-ft TORQUE	<i>optional</i>
EATON RTLO20918B 18 SPEED, 2050 lb-ft TORQUE	<i>optional</i>

TRANSMISSION - AUTOMATED MANUAL TRANSMISSION (AMT)

ENDURANT EHD-14F112C-V AUTOMATED TRANSMISSION	<i>optional</i>
---	-----------------

TRANSMISSION - AUTOMATIC

ALLISON 3200P 6 SPEED, 1100 lb-ft TORQUE	<i>optional</i>
ALLISON 4440P 6 SPEED, 1310 lb-ft TORQUE	<i>optional</i>

FRONT AXLE

DANA E-1462I - 6.6t GAWR	<i>standard</i>
DANA DUAL E-1322I - 12.0t GAWR	<i>optional</i>
MERITOR MFS66-122 - 6.6t GAWR	<i>optional</i>
MERITOR DUAL MFS66 - 122 - 13.2t GAWR	<i>optional</i>

REAR AXLE

DANA DS405 - 18.1t GAWR	<i>standard</i>
DANA DSH40P - 18.1t GAWR	<i>optional</i>
DANA DSH40P WITH R22BS LAZY TAG - 27.1t GAWR	<i>optional</i>
DANA DS405 WITH R22BS LAZY TAG - 27.1t GAWR	<i>optional</i>
DANA DSH40P WITH HENDRICKSON TOUGHLIFT FMT - 27.1t GAWR	<i>optional</i>
DANA DS405 WITH HENDRICKSON TOUGHLIFT FMT - 27.1t GAWR	<i>optional</i>
MERITOR MT-18-14XG - 18.1t GAWR	<i>optional</i>
MERITOR MT-20-14XG - 20.0t GAWR	<i>optional</i>
MERITOR MT-18-14XG WITH HENDRICKSON TOUGHLIFT FMT - 27.1t GAWR	<i>optional</i>
MERITOR MT-20-14XG WITH HENDRICKSON TOUGHLIFT FMT - 29.0t GAWR	<i>optional</i>

REAR SUSPENSION

KENWORTH AIRGLIDE 400 - 18.1t GAWR	<i>standard</i>
KENWORTH AIRGLIDE 400 WITH HENDRICKSON TOUGHLIFT FMT - 22.5t GAWR	<i>optional</i>
KENWORTH AIRGLIDE 600 - 27.0t GAWR	<i>optional</i>

BRAKES

DRUM	<i>standard</i>
DISC	<i>optional</i>

SAFETY SYSTEMS

ABS - ANTILOCK BRAKING SYSTEM	<i>standard</i>
DTC - DRAG TORQUE CONTROL	<i>standard</i>
ATC - AUTOMATIC TRACTION CONTROL	<i>standard</i>
ESP - ELECTRONIC STABILITY PROGRAM**	<i>standard</i>
HSA - HILL START ASSIST*	<i>optional</i>
TRM - TRAILER RESPONSE MANAGEMENT	<i>optional</i>
SOD - BLINDSPOTTER SIDE OBJECT DETECTION SYSTEM	<i>optional</i>

INTEGRATED ACTIVE SAFETY SYSTEMS

ACB - ACTIVE CRUISE CONTROL WITH BRAKING**	<i>standard</i>
LDW - LANE DEPARTURE WARNING**	
CMS - COLLISION MITIGATION, INCLUDING:	
AEB - AUTONOMOUS EMERGENCY BRAKING	
HDW - HIGHWAY DEPARTURE WARNING WITH BRAKING	
MAEB - MULTI-LANE AUTONOMOUS EMERGENCY BRAKING	

Note: Fusion requires additional 30mm in front of bumper/bullbar for radar unit.

* Only with Automated Manual Transmission (AMT).

** Standard on 6x4. Exceptions apply depending on axle configuration/wheelbase/application.

WHEELS

ALLOY 10 STUD	<i>standard</i>
ALCOA PACCAR STYLE ALLOY 10 STUD	<i>optional</i>

FUEL TANKS

RANGE OF PACKAGES AVAILABLE

ADBLUE

62L ADBLUE UREA TANK LEFT HAND REAR	<i>standard</i>
62L ADBLUE UREA TANK RIGHT HAND REAR	<i>optional</i>

PAINT

SINGLE COLOUR TO CAB	<i>standard</i>
UP TO 3 COLOURS 6 BREAKS	<i>optional</i>

