




CONTRACT SLITTERS (VIC) PTY LTD

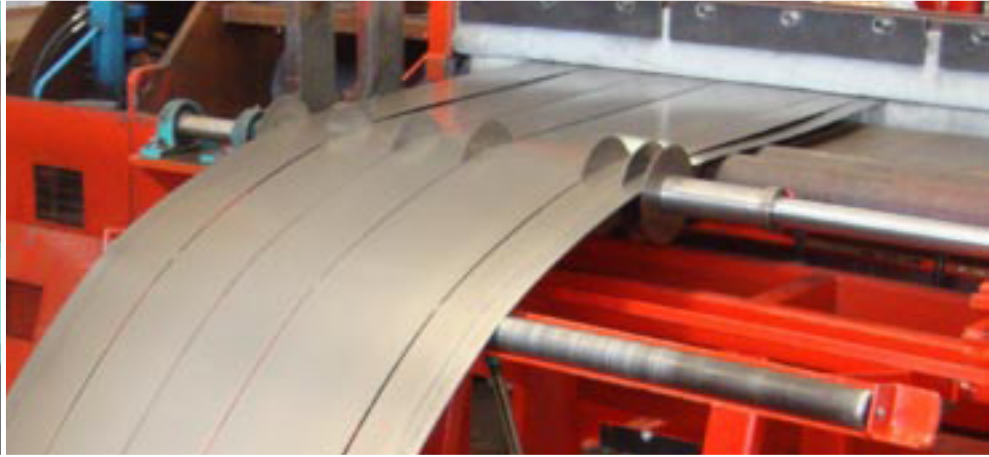

a cut above the rest

CONTRACT SLITTERS
54 - 84 Boundary Road
Braeside VIC 3195

P.O Box 550
Braeside BC, VIC 3195


P: 03 9587 3899

F: 03 9587 0844

STEEL COIL AND SHEET PROCESSING

Slitting Machine Capabilities 2021



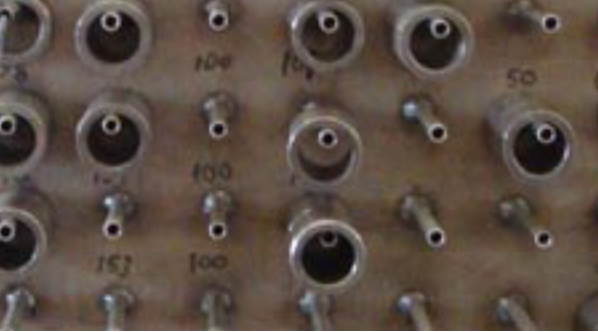

CONTRACT SLITTERS (VIC) PTY LTD

Machine Number 2

1500 mm Driven Head

Material Type

Cold Rolled, Hot Rolled,
Stainless Steel, Coated

SLITTING SPECIFICATIONS

Material Thickness Range	0.35 mm – 2.00 mm
Minimum Slit Width	25 mm
Maximum Slit Width	1200 mm
Material Trim Allowance	4.00 mm per side 8.00 mm overall

MACHINE CAPABILITIES - SINGLE PASS-THICKNESS/STRANDS

0.40 mm to 1.20 mm	15 Strands
1.60 mm	15 Strands
2.00 mm	15 Strands

UNCOILER SPECIFICATIONS

Mandrel Size	510 mm to 610 mm maximum
Coil Diameter	1500 mm maximum
Coil Width	150 mm minimum
Coil Width	1500 mm maximum
Coil Weight	9 tonnes maximum

RECOILER SPECIFICATIONS

Mandrel Size	510 mm minimum
Coil Diameter	1500 mm maximum
Coil Weight	9 tonnes maximum



CONTRACT SLITTERS (VIC) PTY LTD

Machine Number 3

900 mm Driven Head

Material Type

Cold Rolled, Hot Rolled,
Stainless Steel, Coated

SLITTING SPECIFICATIONS

Material Thickness Range	0.4 mm – 3.00 mm
Minimum Slit Width	12 mm
Maximum Slit Width	900 mm
Material Trim Allowance	3.00 mm per side 6.00 mm overall

MACHINE CAPABILITIES - SINGLE PASS-THICKNESS/STRANDS

0.40 mm to 0.8 mm	16 Strands
0.9 mm to 1.0 mm	14 Strands
1.1 to 1.4 mm	12 Strands
1.5 mm to 1.6 mm	10 Strands
1.7 mm to 2.00 mm	8 Strands
2.1 mm to 2.5 mm	8 Strands
2.3 mm to 2.5 mm	8 Strands
3.00 mm	5 Strands

UNCOILER SPECIFICATIONS

Mandrel Size	450 mm to 510 mm maximum
Coil Diameter	1500 mm maximum
Coil Width	30 mm minimum
Coil Width	914 mm maximum
Coil Weight	7.5 tonnes maximum

RECOILER SPECIFICATIONS

Mandrel Size	510 mm minimum
Coil Diameter	1500 mm maximum
Coil Weight	6.0 tonnes maximum



CONTRACT SLITTERS (VIC) PTY LTD

Machine Number 4

500 mm Pull Through

Material Type

Cold Rolled, Hot Rolled,
Stainless Steel, Coated

SLITTING SPECIFICATIONS

Material Thickness Range	0.3 – 1.60 mm
Minimum Slit Width	8.0 mm
Maximum Slit Width	500 mm
Material Trim Allowance	3.00 mm per side 6.00 mm overall

MACHINE CAPABILITIES - SINGLE PASS-THICKNESS/STRANDS

0.40 mm to 0.5 mm	12 Strands
0.60 mm to 0.7 mm	12 Strands
0.8 to 0.9 mm	10 Strands
1.00 mm to 1.20 mm	8 Strands
1.3 mm to 1.40 mm	6 Strands

UNCOILER SPECIFICATIONS

Mandrel Size	510 mm maximum
Coil Diameter	1200 mm maximum
Coil Width	20 mm minimum
Coil Width	500 mm maximum
Coil Weight	2.5 tonnes maximum

RECOILER SPECIFICATIONS

Mandrel Size	510 mm minimum
Coil Diameter	1200 mm maximum
Coil Weight	2.5 tonnes maximum



CONTRACT SLITTERS (VIC) PTY LTD

Machine Number 5

160mm Pull Through

Material Type

Cold Rolled, Hot Rolled,
Stainless Steel, Coated



SLITTING SPECIFICATIONS

Material Thickness Range	0.2 mm 1.00 mm
Minimum Slit Width	4.0 mm
Maximum Slit Width	160 mm
Material Trim Allowance	2.00 mm per side
	4.00 mm overall

MACHINE CAPABILITIES-SINGLE PASS-THICKNESS/STRANDS

0.2 mm to 0.4 mm	8 Strands
0.50 mm to 0.6 mm	8 Strands
0.7 mm	7 Strands
0.8 mm	6 Strands
0.9 mm to 1.00 mm	3 Strands

UNCOILER SPECIFICATIONS

Mandrel Size	310 mm – 510 mm maximum
Coil Diameter	1500 mm maximum
Coil Width	15 mm minimum
Coil Width	160 mm maximum
Coil Weight	1.5 tonnes maximum

RECOILER SPECIFICATIONS

Mandrel Size	320 - 420 mm maximum
Coil Diameter	1200 mm maximum
Coil Weight	1.5 tonnes maximum



CONTRACT SLITTERS (VIC) PTY LTD

Machine Number 6

1220 mm Heavy Gauge
Pull Through

Material Type

Cold Rolled, Galvanised



SLITTING SPECIFICATIONS

Material Thickness Range	1.20 mm – 6.00 mm
Minimum Slit Width	19 mm
Maximum Slit Width	1220 mm
Material Trim Allowance	6.00 mm per side
	12.00 mm overall

MACHINE CAPABILITIES-SINGLE PASS - THICKNESS/STRANDS

1.6 mm to 2.0 mm	20 Strands
2.50 mm	17 Strands
3.00 mm	15 Strands
3.50 mm	12 Strands
4.00 mm	10 Strands
4.50 mm	7 Strands
5.00 mm	6 Strands
6.00 mm	4 Strands

UNCOILER SPECIFICATIONS

Mandrel Size	510 mm minimum 750 mm maximum
Coil Diameter	1500 mm maximum
Coil Width	100 mm minimum
Coil Width	1220 mm maximum
Coil Weight	10 tonnes maximum

RECOILER SPECIFICATIONS

Mandrel Size	510 mm minimum
Coil Diameter	1500 mm maximum
Coil Weight	10.0 tonnes maximum



CONTRACT SLITTERS (VIC) PTY LTD

SHEARLINE

Material Type

Cold Rolled, Stainless
Steel, Coated,
Aluminium



SHEARING SPECIFICATIONS

Material Thickness Range	0.3 mm – 1.50 mm
Minimum Slear Width	50 mm
Maximum Slear Width	1500 mm
Material Trim Allowance	4.00 mm per side
	8.00 mm overall
MAXIMUM CUTS (Slear)	4 Strands

UNCOILER SPECIFICATIONS

Mandrel Size	510 mm minimum 610 mm maximum
Coil Diameter	1200 mm maximum
Coil Width	50 mm minimum
Coil Width	1525 mm maximum
Coil Weight	8 tonnes maximum

RECOILER SPECIFICATIONS

Not Applicable



CONTRACT SLITTERS (VIC) PTY LTD

GUILLOTINE

Material Type

Cold Rolled, Stainless
Steel, Coated,
Aluminium

GUILLOTINE SPECIFICATIONS

Material Thickness	4.50 maximum
Cut Width	25 mm minimum
Feed Width	1500 mm maximum length





CONTRACT SLITTERS (VIC) PTY LTD

Our Company

CONTRACT SLITTERS

54 - 84 Boundary Road
Braeside VIC 3195

P.O Box 550
Braeside BC, VIC 3195

P: 03 9587 3899

F: 03 9587 0844

A CUT ABOVE THE REST

Contract Slitters is a privately owned, independent Steel Sheet and Coil processing centre. With 20 years experience in the field, we believe our customer service, quality and product knowledge is second to none.

At Contract Slitters, we quote all of your enquiries on an individual basis to ensure our customers receive not only the best price, but the best customer service the industry can offer.

WE SPECIALIZE IN:

Heavy Gauge Narrow Width Slitting

Light Gauge Narrow Width Slitting

Minimum Trim Slitting

Minimum Camber Slitting

Scrapless Slitting

Re coiling and re works

Processing of ferrous and non ferrous material

OTHER SERVICES:

Coil Storage

Palletising

Export Packing and Palletising

Wrapping